
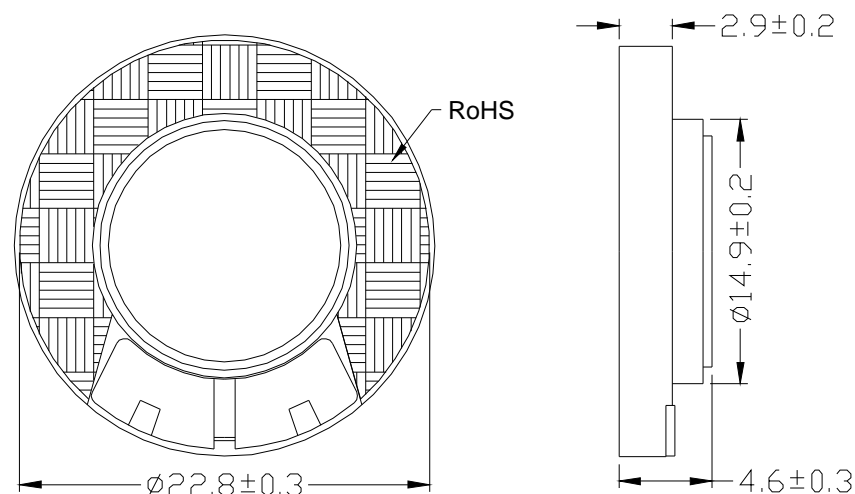


## Receiver Specification

Our Part No		23P02T-50WE32-6H14+	
Size	Diameter 23mm	Total Height	4.6 mm
No.	Item	Specification	Testing Condition
1.	Rated Imp	32ohm $\pm$ 15%	At 1 kHz 1.0V
2.	D.C Impedance	29.8ohm $\pm$ 10%	At 20°C
3.	Output S.P.L.	104 $\pm$ 3dB	At 100mV IEC318 1KHz
4.	Input Power	Rated Power: 50mW	Max Power: 80mW
5.	Frequency Range	200---3KHz	Output S.P.L. -10dB
6.	Operation	Must Be Normal	Program Source 50mW
7.	Buzzes & Rattles	Must Be Normal	Sin Wave 1.26V
8.	Load Testing	After Test Meet 2&7	50mW 96hours White Noise
9.	Distortion	5% Max	Input Rated Power at 1000Hz
10.	Heat Testing	After Test 7&8&9	+60°C $\pm$ 3°C 48hours
11.	Cold Testing	After Test 7&8&9	-25°C $\pm$ 3°C 48hours
12.	Humidity Testing	After Test 7&8&9	40°C $\pm$ 2°C 90~95% R.H. 48hours
13.	Insulation Resistance	1M $\Omega$	Dc100v FRA. And TER.
14.	Magnet Size	$\varnothing$ 9.5 $\times$ 1.5	N35
15.	Net Weight	1.9 g/PC	
16.	Polarity	When a positive D.C voltage is applied to the terminal marked (+) or red, the diaphragm should move to the front.	

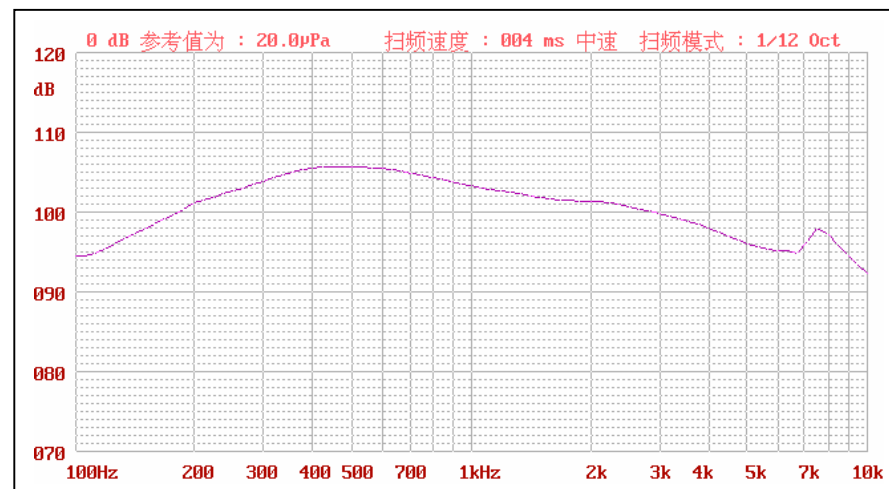

**POWER SOUND ELECTRONICS LTD.** - Acoustic Components Manufacturer

Tel: +86-755-8423 5076,8423 5093,8423 5316 Fax: +86-755-8423 5085 E-mail: [psound@szonline.net](mailto:psound@szonline.net)

<http://www.chnpowersound.com>